


# TURBOPOWER® GAS/OIL • PACKAGED WATER HEATER POLYSHIELD® POLYMER-LINED STORAGE TANK

### **TANK SERIES 900 GALLONS**

Model	Recovery gph ①		Input	Min. Inlet Flow Gas Pressure	#2 Oil	Dimensions (inches)			Blower Motor		Shipping Weight	
Number	40°- 120°F	40°- 140°F	Btu/h	"W.C. 3	gph	Α	В	С	J ②	HP	Volt/Ph/ Amps	lbs
750 P 900A-TPGO	750	600	600,000	4.5	4.3	46	6	1	31	1/2	115/1Ø/10	3320
1000 P 900A-TPGO	1000	800	800,000	6.0	5.7	46	8	1	31	1/2	115/1Ø/10	3360
1250 P 900A-TPGO	1250	1000	1,000,000	7.5	7.2	46	8	1	31	3/4	115/1Ø/14	3450
1500 P 900A-TPGO	1500	1200	1,200,000	7.5	8.6	46	8	1-1/4	31	1	115/1Ø/16	3530
2000 P 900A-TPGO	2000	1600	1,600,000	6.5	11.4	60	10	2	36	2	115/1/Ø24	3740
2500 P 900A-TPGO	2500	2000	2,000,000	8.0	14.3	60	10	2	36	2	115/1Ø/24	3860

- Recoveries based on 83% thermal efficiency. ASHRAE 90.1 compliant for efficiency and standby loss.
- <sup>2</sup> "J" dimension is for the burner housing only. Gas train may exceed this dimension.
- 3 Standard gas train.
- \* The information presented is for Natural gas 0.6 S.G.— For operation with propane (LP gas), consult factory. Dimensions are in inches unless otherwise specified.
  - Higher inputs available. Consult the factory.

For standard and optional equipment, see form PV 6047.

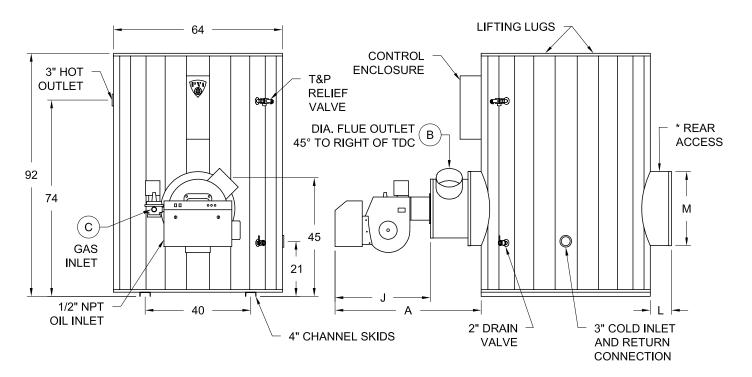

## \* GAS PRESSURE REQUIREMENTS

SEE TABLE FOR MINIMUM PRESSURE BY MODEL NUMBER.

MAXIMUM STATIC INLET PRESSURE: 14" W.C.

FOR PRESSURES OTHER THAN LISTED, CONSULT FACTORY.

Pressure shown is for standard UL gas train. Additional controls

may increase pressure requirements.

#### **VENTING REQUIREMENTS**

-.02" TO -.06" W.C. (NEGATIVE PRESSURE)

ENTIRE VENT SYSTEM SHOULD NEVER BE SIZED BASED UPON THE VENT CONNECTION DIAMETER EXCLUSIVELY. FOR PROPER SIZING, CONSULT THE NATIONAL FUEL GAS CODE UNDER "FAN-ASSISTED."

* REAR ACCESS MODULE									
MODEL PREFIX	М	L	STD or OPTIONAL						
750-1500	23"	8"	OPTIONAL						
2000-2500	23"	8"	STANDARD						

#### STANDARD ELECTRICAL REQUIREMENTS

CONTROL VOLTAGE: 120V, 1Ø, 60 HZ., 2 AMPS. MOTOR VOLTAGE:

208V, 230V, AND 460V MOTORS ARE AVAILABLE BUT WILL REQUIRE A SEPARATE 120V/2 amps CONTROL CIRCUIT OR AN OPTIONAL CONTROL CIRCUIT TRANSFORMER.

PVI RESERVES THE RIGHT TO CHANGE THE DESIGN AND SPECIFICATION WITHOUT NOTICE.